

**COMMAX**

# VIDEO PHONE CAMERA

**OUTDOOR CAMERA****DRC-40BS/40CS****COMMAX Co.,Ltd.**

- Thank you for purchasing our COMMAX product.
- Please carefully read this User Guide (in particular, precautions for safety) before using the product and follow the instructions to use your product exactly.
- The company is not responsible for any safety accidents caused in abnormal operation of the product.

**SPECIFICATION**

Spec. \ Model	DRC-40BS	DRC-40CS
Pick Up Device	B/W C.C.D 1/3"	COLOR C.C.D 1/4"
Wiring (House/Door Release)	4 wires in NonPolarity 2 wires in NonPolarity	
Related voltage	12V DC (from a monitor)	
Conversation Method	Simultaneous Conversation	
Angle Adjustment	H: 68° H: 55°	Up: 8° Down: 12°
Horizontal/Vertical Scanning	15.734KHz/60Hz, 15.625KHz/50Hz	
Min. Illumination	0 LUX(300mm from Camera)	
Temperature	-10°C ~ +40°C	
Dimension	99.5(W) × 141.5(H) × 37(D)mm	
Weight	300g	

- ◆ Package contents  
SCREW : T4X18mm 2EA, M3X10mm 1EA  
Manual


**COMMAX**

# VIDEO PHONE CAMERA

**OUTDOOR CAMERA****DRC-40BS/40CS****COMMAX Co.,Ltd.****SPECIFICATION**


Spec. \ Model	DRC-40BS	DRC-40CS
Pick Up Device	B/W C.C.D 1/3"	COLOR C.C.D 1/4"
Wiring (House/Door Release)	4 wires in NonPolarity 2 wires in NonPolarity	
Related voltage	12V DC (from a monitor)	
Conversation Method	Simultaneous Conversation	
Angle Adjustment	H: 68° H: 55°	Up: 8° Down: 12°
Horizontal/Vertical Scanning	15.734KHz/60Hz, 15.625KHz/50Hz	
Min. Illumination	0 LUX(300mm from Camera)	
Temperature	-10°C ~ +40°C	
Dimension	99.5(W) × 141.5(H) × 37(D)	
Weight	300g	

## Part Names.

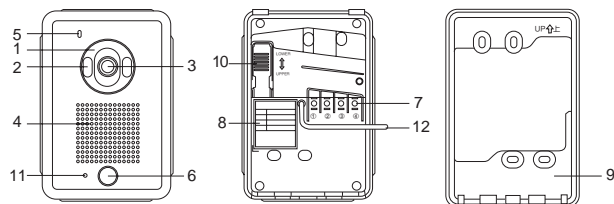


- |                       |   |
|-----------------------|---|
| 1. Protection shield. | 7. Monitor Connection terminal.                         |
| 2. Lamp at night      | 8. Description Label.                                   |
| 3. C.C.D Camera Lens  | 9. Bracket mounting a wall                              |
| 4. Speaker            | 10. Angle adjustment lever.                             |
| 5. MIC.               | 11. Power lamp : When talking with a monitor, it is on. |
| 6. Call button.       | 12. Door Release connection terminal                    |

## Wiring and Installation.

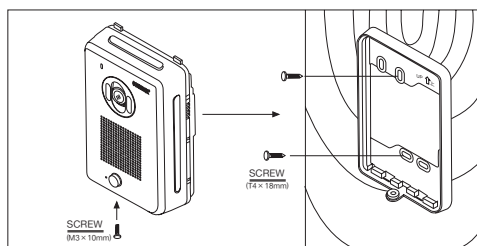

1. Fix a bracket to wall with screws (M3 x 10mm) supplied.
2. Please fix the desired angle of a lens with angle adjustment lever before fixing it.
3. Put a camera unit into a bracket.
4. Recheck the desired position of a camera unit to be installed through the image of a monitor.




A Monitor

A door camera unit




## Part Names.

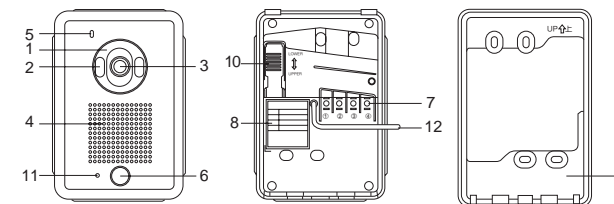


- |                       |   |
|-----------------------|---|
| 1. Protection shield. | 7. Monitor Connection terminal.                         |
| 2. Lamp at night      | 8. Description Label.                                   |
| 3. C.C.D Camera Lens  | 9. Bracket mounting a wall                              |
| 4. Speaker            | 10. Angle adjustment lever.                             |
| 5. MIC.               | 11. Power lamp : When talking with a monitor, it is on. |
| 6. Call button.       | 12. Door Release connection terminal                    |

## Wiring and Installation.

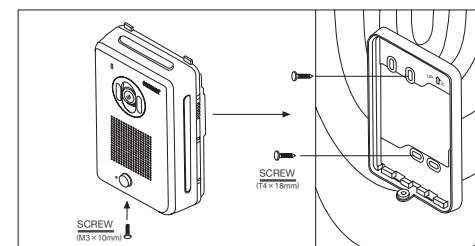


1. Fix a bracket to wall with screws (M3 x 10mm) supplied.
2. Please fix the desired angle of a lens with angle adjustment lever before fixing it.
3. Put a camera unit into a bracket.
4. Recheck the desired position of a camera unit to be installed through the image of a monitor.



A Monitor

A door camera unit



VOLT London LTD.  
Authorized COMMAX Distributor in UK  
[www.volt-london.com](http://www.volt-london.com)